



**Electro Standards Laboratories**  
ADVANCED SYSTEMS DESIGN & SERVICES

**SPECIFICATIONS**  
**MODEL 7499**  
Cat. No. 307499

## PathWay® Model 7499 Tri-Channel BNC A/B Switch with Contact Closure Remote

• **Great for Audio & Video Remote Switch Applications!**

### INTRODUCTION

The Model 7499 Tri-Channel BNC A/B Switch with Contact Closure Remote Port allows the user the capability of accessing two separate devices, ports A and B, via connection through a device connected to the Common port for each channel. The Model 7499 is enclosed in a 1U, full rack size, all metal black chassis designed to provide EMI/RFI shielding and fit in a standard 19" rack.

The switch may be controlled manually via the front panel pushbutton or remotely from a DB9 port located on the rear of the unit.

Switch position state may be attained via the front panel LED's.

### FEATURES:

- Each channel allows access to two BNC networks from one COMMON BNC network or device.
- Simultaneous control of all channels.
- Front panel pushbutton control.
- Both the Center and Shell of the BNC interface are switched via break-before-make electromechanical relays.
- Front panel LED's display present position and power status.
- The switch ports are transparent to all data.
- **All BNC ports are impedance matched to support 75 Ohm equipment.**
- The unit maintains last set position on power loss and continues to pass data.
- Upon power up, the unit will switch based on Remote Contact Closure state.
- Remote Contact Closure Control provides dry contact logic to allow control of the switch position and lockout state.
- Attractive all metal black box packaging provides EMI/RFI shielding.



### SPECIFICATIONS:

**PORT CONNECTORS:** (3) BNC (F) connectors labeled A, B and COMMON for each Channel.

**DISPLAY:** (2) Front panel LED's display switch position and power status.

**REMOTE:** (1) DB9 female connector on rear panel accepts Contact Closure signals for Remote Control Operation.


**POWER:** UL approved 100VAC/240VAC, 50Hz/60Hz wall mount power module supplies 12 VDC, 500mA to the unit. Has 2-prong, US, non-polarized plug.

**DIMENSIONS:** Rackmount 19.0" W x 1.75" H x 10.47" D. (48.3 x 4.4 x 26.6 cm), (1U rack height).

**WEIGHT:** Approximately 5.7 lbs. (2.6 kg)

### WIDE RANGE POWER OPTION AVAILABLE:

(Cat No 517277) **CE, RoHS, and UL** listed table mount power module, 100VAC/240VAC, 50Hz/60Hz for use in place of standard power module that is included with the unit. Has IEC 60320 C14 inlet. **Ideal for international applications.**

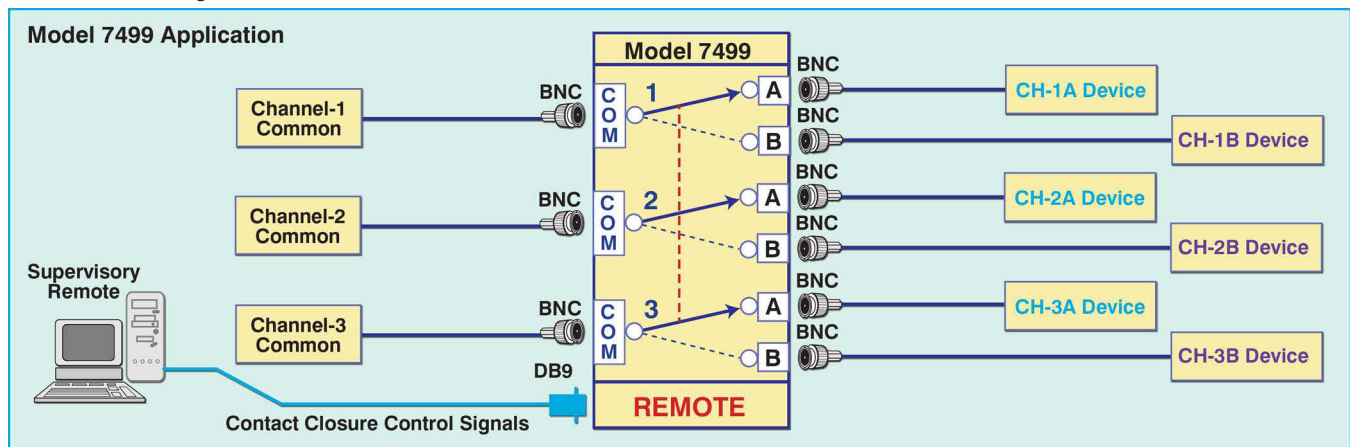

### Suggested cables for use with Model 7199 Switch.

Part Number	Description	Unit Price
990136-006	RG58 Coaxial Cable, 50 ohm, 6 ft. (M/M)	\$32.10
990136-010	RG58 Coaxial, 50 ohm, 10 ft. (M/M)	\$33.50
890426-006	Thinnet RG58 Coaxial Cable, 50 ohm, 6 ft. (M/M)	\$33.00
890426-010	Thinnet RG58 Coaxial Cable, 50 ohm, 10 ft. (M/M)	\$35.00

36 Western Industrial Drive, Cranston, RI 02921  
Tel: 401-943-1164 Fax: 401-946-5790

www.ElectroStandards.com  
E-mail: eslab@ElectroStandards.com