SPECIFICATIONS MODEL 8084

(Cat. No. 308084)

Model 8084 Single Channel RJ45 Cat5e A/B Rotary Switch, No Enclosure

INTRODUCTION


The Model 8084 Single Channel RJ45 Cat5e A/B Rotary Switch allows the user the capability of accessing two separate devices, ports A and B, via connection through a device connected to the Common port. The Model 8084 is provided as a rotary switch with cabled RJ45's for installation into any custom enclosure. No power is required for operation.

FEATURES:

- The switch ports are transparent to all data.
- All (8) pins of the RJ45 interface are switched via breakbefore-make rotary switch.
- No power required for operation.
- Switch and cabled RJ45's allow install into custom enclosures.
- Leg Lengths: 20" (50.8 cm).
- Certified for Cat 5e compliance.

COMPONENTS PROVIDED:

- Rotary Switch with A/B/COM RJ45's The switch has the RJ45's soldered and labeled appropriately. The washer and nut for installing the switch is provided on the switch.
- **Knob** To be installed on the rotary switch shaft to facilitate turning the switch. (P/N 502241).
- Icons Blue/Black/Red icons (1 of each) provided that show a "Computer" image on one side and a "Telephone" image on the other. These are used to secure the RJ45's once installed in an enclosure.
- Allen Wrench The 1/16" Allen wrench provided for installing the knob. (P/N 507460).

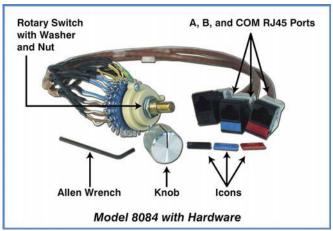



SPECIFICATIONS:

PORT CONNECTORS: (3) RJ45 female connectors

labeled A, B, and COMMON.

TWO SWITCH POSITIONS: (1) Rotary switch selects


COM to A, or COM to B.

PINS SWITCHED: All 8 pins are switched via breakbefore-make rotary switch.

POWER: No power required. Manually operated.

WEIGHT: Approximately, 0.3 lb. (0.2 kg)

LEG LENGTHS: 20" (50.8 cm)

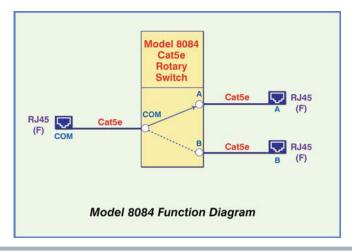

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax:401-946-5790

www.ElectroStandards.com E-mail:eslab@ElectroStandards.com