

Model 8652 DB25 RS232 A/B/C/D/E/F Switch, Desktop, Manual Operation

INTRODUCTION

The Model 8652 DB25 RS232 A/B/C/D/E/F Switch allows the user the capability of sharing a DB25 interface device connected to the "COMMON" port among six other devices connected to the "A", "B", "C", "D", "E", and "F" ports.


FEATURES:

- Allows quick connection to any one of six devices from one COMMON device.
- High quality sealed switch with self-wiping low impedance contacts.
- Eliminates the need to plug and unplug cables.
- No external power required.
- Transparent to data speed and format.
- Manual operation via front-panel rotary switch.
- Attractive anodized black box packaging provides EMI/RFI shielding.
- Custom length DB25 cables available for your switch installation.
- All 25 pins of the DB25 interface are switched.
- Improves computer network efficiency by allowing sharing of peripherals.
- Lifetime guarantee against manufacturing defects.



Specifications:

PORT CONNECTORS: (7) DB25 female connectors labeled A, B, C, D, E, F and COM.
FRONT PANEL CONTROL: (1) Rotary switch on front panel selects A, B, C, D, E, or F.
POWER: No power required. Manually operated.
DESKTOP ENCLOSURE: 7.8"W x 2.8"H x 7.25"D. (19.5 x 7.0 x 18.1 cm)
WEIGHT: 2 lbs. (0.9 Kg)

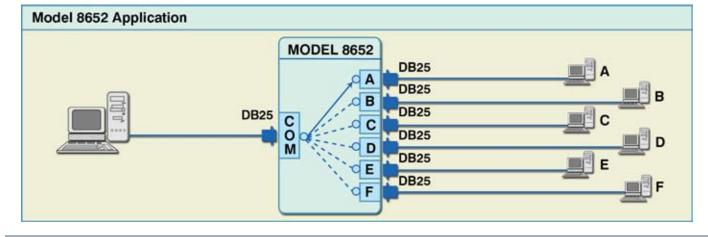

36 Western Industrial Drive,	Cranston, RI 02921
Tel: 401-943-1164	Fax:401-946-5790

www.ElectroStandards.com E-mail:eslab@ElectroStandards.com