

LineSelect Model 9473 4-Channel RJ45 Cat6 A/B Switch, Simultaneous Control

• Applicable to switching ANY RJ45 interface, quickly and reliably.

INTRODUCTION

The **LineSelect**® Model 9473 enables each of four RJ45 Cat6 Common ports to select either of two network LANs or devices, via A or B port RJ45 connectors. All four channels of the **LineSelect**® Model 9473 A/B Switch are switched simultaneously via rotary switch knob located on the front panel.

The unit supports all 8 pins of the RJ45 Cat6 interface. No need to plug and unplug cables thereby eliminating connector wear. The *LineSelect*® Model 9473 is enclosed in a 1U, full rack size, all metal black chassis designed to provide EMI/RFI shielding and fit in a standard 19" rack.

FEATURES:

- Simultaneously switch all four channels of RJ45 A/B via front panel rotary switch knob.
- Tested for Cat6 compliance.
- All 8 pins of the RJ45 interface are switched via breakbefore-make rotary switch.
- High quality sealed switch with self-wiping low impedance contacts.
- Manually operated. No power required.
- Attractive all metal black box packaging provides EMI/RFI shielding.
- Rackmount configuration is standard.
- Lifetime warranty against manufacturing defects.


LineSelect Model 9473

SPECIFICATIONS:

PORT CONNECTORS: (12) RJ45 female connectors, three labeled A, B, and COMMON, for each of the 4 channels.

FRONT PANEL CONTROL: (1) Rotary switch on front panel switches all 4 channels simultaneously.
POWER: No power required. Manually operated.
DIMENSIONS: Rackmount 19.0" W x 1.75" H x 8.65" D. (48.3 x 4.4 x 22.0 cm)
WEIGHT: Approximately 2.0 lbs. (0.9 kg)

Be sure to order the Cat6 patchcords at custom lengths to improve system performance.

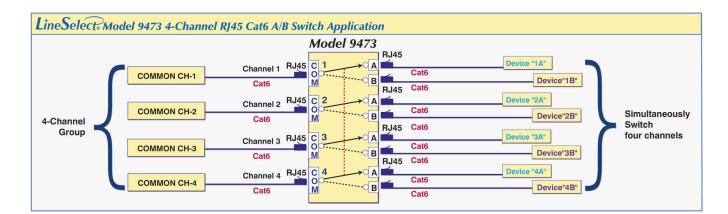

 36 Western Industrial Drive, Cranston, RI 02921

 Tel: 401-943-1164
 Fax:401-946-5790

www.ElectroStandards.com E-mail:eslab@ElectroStandards.com